


DATASHEET

RFID Keyfob Entrance

Our RFID keyfobs combine the RFID technology with good looking and practical keyfob housings. They can easily be fitted to a normal key ring. They are available with all common ICs in 125 kHz as well as in 13.56 MHz. The Entrance keyfob is among the most robust keyfobs in the market.

Applications:

- Access Control
- Identification
- Time Attendance
- Health Clubs

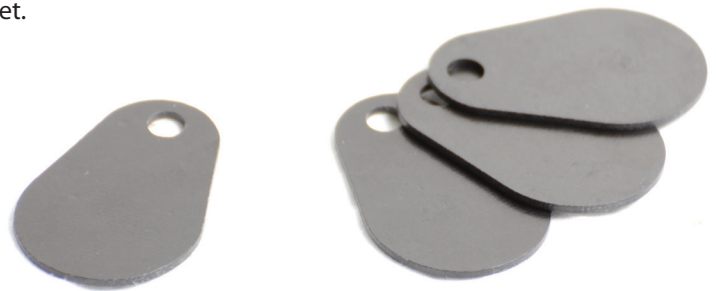

Personalisation options:

- Laser Engraved Number

Product specification:

Dimensions:	45 × 30 × 1,6 mm
Weight:	7 g
Material:	Glass fibre
Colours:	black
Surface:	opaque
Application temp.:	up to +130 °C

Available 125 kHz systems:

IC Type	Memory	Mode
EM4100/4200	8 Bytes	Read Only
EM4450/4550	125 Bytes	R/W
Atmel Temic 5567/5577	28 Bytes	R/W
NXP Hitag 1 & 2	256 Bytes 32 Bytes	R/W
NXP Hitag S256 & S2048	32 Bytes 256 Bytes	R/W

Other IC types available on request!

Available 13.56 MHz systems:

IC Type	Memory	ISO
NXP Mifare Ultralight	64 Bytes	14443A
NXP Mifare MF1S20 / MF1S50 / MF1S70	256 Bytes 1024 Bytes 4096 Bytes	14443A (1-3)
NXP Mifare DESFire EV1	2 kBytes 4 kBytes 8 kBytes	14443A
NXP I-Code SLI	1024 bits	15693
LEGIC MIM256 & MIM1024	256 Bytes 1024 Bytes	-
LEGIC Advant 1024 & 2048	1024 Bytes 2048 Bytes	-
TI HFI - Plus	1024 Bytes	-



PLASTIKKARTENMONSTER